

CHEM-PRO C2 & C3

- Feed Rates to 40 GPH / 153 LPH
- System Pressures to 175 PSI / 12 bar
- Diaphragm Failure Detection
- PVDF/Ceramic Head Components
- Full Stroke Every Time Avoids Vapor Lock
- Quiet variable Speed Motor
- NEMA 4X (IP 66) Washdown
- 2 Year Warranty



Applications:

- Chemical Metering
- Wastewater Treatment
- Municipal Water Treatment
- Boiler Treatment
- Cooling Tower Treatment
- Acid Injection
- Plating Chemical Injection
- Fluoridation
- Paper / Pulp Chemical Feed
- Fertilizer Injection

Features:

- Operator friendly digital controls with backlit LCD display and DFD alarm display.
- Signal inputs include: 4-20mA, pulse inputs, and Remote start/stop
- Signal outputs include: Relay (3 amp), open collector, 4-20mA (optional)
- Large PVDF, Ceramic, double ball check valves without metal springs.
- Priming and degassing valve built into the pump head.
- Backlit LCD displays motor speed, input signal values, service and alarm status.
- Includes Diaphragm Failure Detection (DFD) system.
- Compatible with Blue-White's Flow Verification Sensor (FVS) system.
- Alarm relay monitors the DFD system and the FVS system.
- SCADA ready 5-30V DC open collector output loop closes while motor is energized.
- NEMA 4X (IP66) wash-down, chemically resistant powder coated enclosure.
- **New Features Include :**
 - Patent pending Dia-Flex™ PVDF single-layer Diaphragm
 - Increased feed rate resolution, from 1% to 0.1%
 - Remote Start/Stop standard on all models
 - 4-20mA output available
 - Upgradeable firmware
 - Large single piece junction box – 40% larger
 - Terminal block connectors inside junction box
 - Larger, more intuitive control-pad
 - Protective LCD snap-on cover
 - Profibus, Profinet, Ethernet, Modbus TCP, and Modbus RTU options available

Specifications:

Maximum working pressure:
175 psig (12 bar) (model specific)

Maximum Fluid temperature:
130° F (54° C)

Operating Temperature:
14° F to 115° F (-10° C to 46° C)

Storage Temperature:
-40° F to 158° F (-40° C to 70° C)

Operating Voltage (Model Specific):
115VAC/60Hz, 1ph (1.5 Amp Maximum)
230VAC/60Hz, 1ph (0.7 Amp Maximum)
220VAC/50Hz, 1ph (1.0 Amp Maximum)
240VAC/50Hz, 1ph (1.0 Amp Maximum)

Power Cord Plug Type (Model Specific):
115V60Hz = NEMA 5/15 (USA)
230V60Hz = NEMA 6/15 (USA)
220V50Hz = CEE 7/II (EU)
240V50Hz = AS 3112 (Australia/New Zealand)

Accuracy:
+/- 2% of full scale
Repeatability +/- 0.5%

Duty cycle:
Continuous

Output adjustment range:
1-100% in 0.1% increments

Maximum viscosity:
1,000 Centipoise

Maximum suction lift:
15 ft. Water, 0 psig (4.5 m, 0 bar)

Display:
Backlit LCD, UV resistant.

Keypad:
Positive action tactile switch keypad.

Enclosure:
NEMA 4X (IP66), Powder coated aluminum.

Approximate shipping wt:
C2 models: 24 lb. (10.9 Kg)
C3 models: 29 lb. (13.1 Kg)

Materials of Construction:

Wetted components:

Pump Head Assembly:

Pump Head:PVDF
Adapter Connections:PVDF
Prime/Degassing Valve:PVDF
Valve Cartridges:PVDF
Valve Balls:Ceramic
Valve Ball Seats:TFE/P Tetrafluorethylene/propylene
Static Seals:FKM (optional EP)
Diaphragm:PVDF

Injection / Back-flow Check valve:

Body & insert:PVDF
Check Ball:Ceramic
Spring:Hastelloy C-276
O-ring seals:FKM (optional EP)

Foot Valve / Strainer:

Body & Adapter:PVDF
Check Ball:Ceramic
Spring:Hastelloy C-276
O-ring seals:FKM (optional EP)
Filter screen:Polypropylene

Suction Tubing:Clear PVC

Discharge Tubing

3/4" x 1/2" Tube connections:Not supplied
1/4" x 3/8" Tube connections:Natural Polyethylene (LLDPE)

Non-Wetted components:

Enclosure:

413 Aluminum (Polyester powder coated)

Pump Head Cover:

413 Aluminum (Polyester powder coated)

Cover Screws:

300 Series Stainless Steel

DFD System Sensor pins:

Hastelloy C-276

Power Cord:

3 conductor, SJTW-A Water-resistant

Tube Installation Tool:


GF Nylon

Mounting Brackets and Hardware:


316 Series Stainless Steel

Output Curves:

C3 Series Models

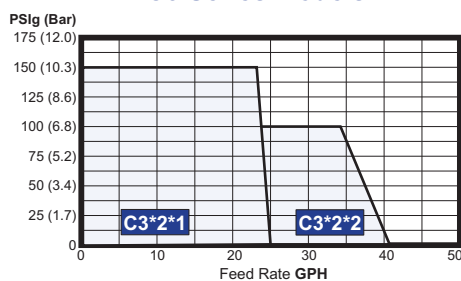

C2 Series Models

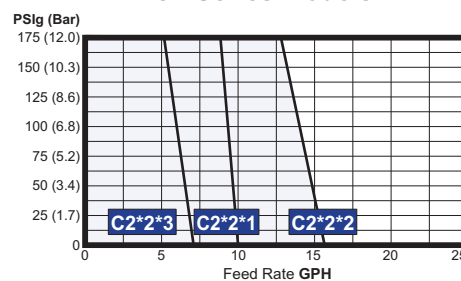

Control Options Comparison:

Feature	F controls	V controls
DFD (Diaphragm Failure Detection) System Alarm	•	•
FVS (Flow Verification System) Alarm *	•	•
Input: Remote Start/Stop (contact closure)	•	•
Output: One 3 Amp 125VAC (24VDC) Alarm Relay	•	•
Output: Motor Run/Stop Open Collector Loop		•
Output: 4-20mA		Optional
Local (manual) 100:1 variable Speed Drive Output Control	•	•
Auto Prime	•	•
Additional Control Inputs: 4-20mA, 0-10VDC, Pulse		•
Operating Modes:		
Manual Adjust Only (100:1 speed adjustment)	•	•
4-20 mA Input Signal		•
High Speed Frequency Input		•
Pulse Triggered Batch Dispensing		•
Serial and ethernet communications: Profibus, Profinet, Ethernet, etc.		•

* Requires Micro-Flo Sensor sold separately

Model Numbers and Output Specifications:

C2 Series Diaphragm Pump | Maximum Strokes per minute 166

Smaller overall size | Higher Pressure Capability | Superior chemical resistance

Feed Rate Range at 0 PSIG		Max Pressure	Outlet Connection	C2F Model Numbers			C2V Model Numbers		
GPH	LPH	PSIG (bar)	Size / Type	115V60 AC	230V60 AC	220V50 AC	115V60 AC	230V60 AC	220V50 AC
.06 - 6.0	.22 - 22	175 (12)	½" Male NPT	C2F243XVA	C2F253XVA	C2F263XVA	C2V243XVA	C2V253XVA	C2V263XVA
.06 - 6.0	.22 - 22	175 (12)	½"Female /NPT	C2F243XVB	C2F253XVB	C2F263XVB	C2V243XVB	C2V253XVB	C2V263XVB
.06 - 6.0	.22 - 22	175 (12)	3/4"OD x 1/2"ID TUBE	C2F243XVC	C2F253XVC	C2F263XVC	C2V243XVC	C2V253XVC	C2V263XVC
.06 - 6.0	.22 - 22	175 (12)	3/8"OD x 1/4"ID TUBE	C2F243XVD	C2F253XVD	C2F263XVD	C2V243XVD	C2V253XVD	C2V263XVD
.10 - 10	.38 - 38	175 (12)	½" Male NPT	C2F241XVA	C2F251XVA	C2F261XVA	C2V241XVA	C2V251XVA	C2V261XVA
.10 - 10	.38 - 38	175 (12)	½" Female NPT	C2F241XVB	C2F251XVB	C2F261XVB	C2V241XVB	C2V251XVB	C2V261XVB
.10 - 10	.38 - 38	175 (12)	3/4"OD x 1/2"ID TUBE	C2F241XVC	C2F251XVC	C2F261XVC	C2V241XVC	C2V251XVC	C2V261XVC
.10 - 10	.38 - 38	175 (12)	3/8"OD x 1/4"ID TUBE	C2F241XVD	C2F251XVD	C2F261XVD	C2V241XVD	C2V251XVD	C2V261XVD
.15 - 15	.55 - 55	175 (12)	½" Male NPT	C2F242XVA	C2F252XVA	C2F262XVA	C2V242XVA	C2V252XVA	C2V262XVA
.15 - 15	.55 - 55	175 (12)	½"Female /NPT	C2F242XVB	C2F252XVB	C2F262XVB	C2V242XVB	C2V252XVB	C2V262XVB
.15 - 15	.55 - 55	175 (12)	3/4"OD x 1/2"ID TUBE	C2F242XVC	C2F252XVC	C2F262XVC	C2V242XVC	C2V252XVC	C2V262XVC
.15 - 15	.55 - 55	175 (12)	3/8"OD x 1/4"ID TUBE	C2F242XVD	C2F252XVD	C2F262XVD	C2V242XVD	C2V252XVD	C2V262XVD

C3 Series Diaphragm Pump | Maximum Strokes per minute 130


Larger overall size | Lower Pressure Capability | Superior chemical resistance

Feed Rate Range at 0 PSIG		Max Pressure	Outlet Connection	C3F Model Numbers			C3V Model Numbers		
GPH	LPH	PSIG (bar)	Size / Type	115V60 AC	230V60 AC	220V50 AC	115V60 AC	230V60 AC	220V50 AC
.25 - 25	.96 - 96	150 (10.3)	½" Male NPT	C3F241XVA	C3F251XVA	C3F261XVA	C3V241XVA	C3V251XVA	C3V261XVA
.25 - 25	.96 - 96	150 (10.3)	½"Female /NPT	C3F241XVB	C3F251XVB	C3F261XVB	C3V241XVB	C3V251XVB	C3V261XVB
.25 - 25	.96 - 96	150 (10.3)	3/4"OD x 1/2"ID TUBE	C3F241XVC	C3F251XVC	C3F261XVC	C3V241XVC	C3V251XVC	C3V261XVC
.25 - 25	.96 - 96	150 (10.3)	3/8"OD x 1/4"ID TUBE	C3F241XVD	C3F251XVD	C3F261XVD	C3V241XVD	C3V251XVD	C3V261XVD
.40 - 40	1.53 - 153	100 (6.8)	½" Male NPT	C3F242XVA	C3F252XVA	C3F262XVA	C3V242XVA	C3V252XVA	C3V262XVA
.40 - 40	1.53 - 153	100 (6.8)	½" Female NPT	C3F242XVB	C3F252XVB	C3F262XVB	C3V242XVB	C3V252XVB	C3V262XVB
.40 - 40	1.53 - 153	100 (6.8)	3/4"OD x 1/2"ID TUBE	C3F242XVC	C3F252XVC	C3F262XVC	C3V242XVC	C3V252XVC	C3V262XVC
.40 - 40	1.53 - 153	100 (6.8)	3/8"OD x 1/4"ID TUBE	C3F242XVD	C3F252XVD	C3F262XVD	C3V242XVD	C3V252XVD	C3V262XVD

CHEM-PRO[®] Diaphragm Metering Pump

Engineering and Technical Data

Dimensions:

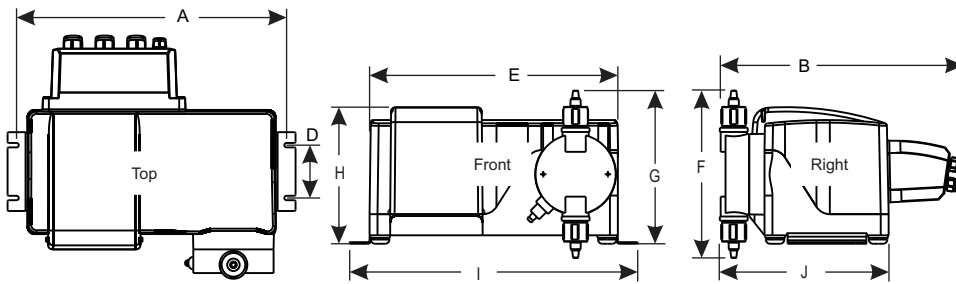

Note: Optional Extended Bracket adds 4.5" (11.43cm) to overall height (dimension G and H). See page 3 for details.

C2 Dimensions			C3 Dimensions		
Dim	Inches	cm	Dim	Inches	cm
A	12.8"	32.5	A	14.1"	35.8
B	11.5"	29.2	B	12"	30.5
D	2.5"	6.4	D	2.5"	6.4
E	11.8"	29.9	E	13.1"	33.2
F	7.9"	20.1	F	9"	22.9
G	7.3"	18.4	G	7.8"	19.8
H	6.5"	16.4	H	6.5"	16.4
I	13.6"	34.6	I	15"	38
J	8"	20.3	J	8"	20.3

Model Number Matrix:

Chem-Pro Model Number																					
C2	Smaller overall size, lower output, higher pressure capability																				
C3	Larger overall size, higher output, lower pressure capability																				
Series																					
F	Single manual output control mode (manual control)																				
V	Multiple automatic input output control and alarm modes (remote control)																				
Maximum Strokes Per Minute																					
2	C2 Series = 166 RPM, C3 Series = 130 RPM (maximum strokes per minute)																				
Input Voltage																					
4	115V / 60Hz, power cord NEMA 5/15 plug (US)																				
5	230V / 60Hz, power cord NEMA 6/15 plug (US)																				
6	220V / 50HZ, power cord NEMA 7/II plug (EU)																				
8	240V / 50HZ, power cord AS 3112 plug (Australia / New Zealand)																				
CAM Stroke Length and Diaphragm Size																					
<table border="1"> <thead> <tr> <th colspan="2">C2 Series Pumps</th> <th colspan="2">C3 Series Pumps</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>.060" (1.52 mm) stroke with small diaphragm</td> <td>1</td> <td>.060" (1.52 mm) stroke with large diaphragm</td> </tr> <tr> <td>2</td> <td>.060" (1.52 mm) stroke with large diaphragm</td> <td>2</td> <td>.100" (1.52 mm) stroke with large diaphragm</td> </tr> <tr> <td>3</td> <td>.040" (1.52 mm) stroke with small diaphragm</td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>.100" (1.52 mm) stroke with large diaphragm</td> <td></td> <td></td> </tr> </tbody> </table>		C2 Series Pumps		C3 Series Pumps		1	.060" (1.52 mm) stroke with small diaphragm	1	.060" (1.52 mm) stroke with large diaphragm	2	.060" (1.52 mm) stroke with large diaphragm	2	.100" (1.52 mm) stroke with large diaphragm	3	.040" (1.52 mm) stroke with small diaphragm			4	.100" (1.52 mm) stroke with large diaphragm		
C2 Series Pumps		C3 Series Pumps																			
1	.060" (1.52 mm) stroke with small diaphragm	1	.060" (1.52 mm) stroke with large diaphragm																		
2	.060" (1.52 mm) stroke with large diaphragm	2	.100" (1.52 mm) stroke with large diaphragm																		
3	.040" (1.52 mm) stroke with small diaphragm																				
4	.100" (1.52 mm) stroke with large diaphragm																				
Electrical Options																					
X	Standard equip. (standard pwr cord based on "input voltage" & junction box based on "output control" selection)																				
A	4-20mA output signal, requires "V" series control																				
Elastomer Material (o-rings)																					
V	FKM/ TFE/P																				
E	EP (Ethylene Propylene)																				
Fitting Connection Types																					
A	1/2" Hose Barb Inlet, 1/2" Male NPT Outlet, with 1/2" Male NPT Injection Fitting																				
B	1/2" Hose Barb Inlet, 1/2" Female NPT Outlet, with 1/2" Male NPT Injection Fitting																				
C	1/2" Hose Barb Inlet and Outlet, with 1/2" ID Hose Barb Injection Fitting																				
D	3/8" OD Tube Compression Inlet, Outlet, and Injection Fitting (C2 pump only)																				
E	1/2" Male NPT Inlet and Outlet, with 1/2" Male NPT Injection Fitting																				
F	1/2" Female NPT Inlet and Outlet, with 1/2" Male NPT Injection Fitting																				
Miscellaneous Options (leave blank for standard model)																					
A	Hastelloy C check valve balls, PTFE prime valve ball, standard injection fittings																				
B	Single 1/2" ceramic ball & Hastelloy C spring P/head check valve for viscous fluids																				
C1	Communications Interface - Profibus DPV1 - (requires "V" series control)																				
C2	Communications Interface - Modbus RTU - (requires "V" series control)																				
C3	Communications Interface - Modbus TCP - (requires "V" series control)																				
C4	Communications Interface - Industrial EtherNet/IP - (requires "V" series control)																				
C5	Communications Interface - Profinet RT I/O - (requires "V" series control)																				
C2	Sample Model Number																				
V																					
2																					
4																					
1																					
X																					
V																					
D																					
A																					